



Professional Association in  
Modern Manufacturing Technologies  
ModTech, Iasi - Romania



# INTERNATIONAL JOURNAL OF MODERN MANUFACTURING TECHNOLOGIES

**Topics:** • Micro and Nanotechnologies; • Rapid Prototyping Technologies; • High Speed Manufacturing Processes; • Ecological Technologies in Machine Manufacturing; • Manufacturing and Automation; • Flexible Manufacturing; • New Manufacturing Processes: Design, Control and Exploitation; • Assembly and Disassembly; • Cold Forming Technologies; • Optimization of Experimental Research and Manufacturing Processes; • Maintenance, Reliability, Life Cycle Time and Cost; • CAD/CAM/CAE/CAX Integrated Systems; • Composite Materials Technologies; • Non-conventional Technologies; • Concurrent Engineering; • Virtual Manufacturing; • Innovation, Creativity and Industrial Development; • Manufacturing Systems; • Welding Technologies; • Industrial Design; • Gear Design and Technologies.

Volume VI  
Number  
2/2014

ISSN 2067-3604

ModTech  
Publishing House



# INTERNATIONAL JOURNAL OF MODERN MANUFACTURING TECHNOLOGIES

<http://www.modtech.ro>

Vol. VI, No. 2  
December 2014

## Topics:

Micro and Nanotechnologies; S Rapid Prototyping Technologies; ^High Speed manufacturing Processes; ^Ecological Technologies in Machine Manufacturing; Manufacturing and Automation; ^Flexible Manufacturing; ^New Manufacturing Processes: Design, Control and Exploitation; V Assembly and Disassembly; S Cold Chilling Technologies; S Optimization of Experimental Research and Manufacturing Processes; V Maintenance, Reliability, Life Cycle, Time and Cost; 3D/CAM/CAE/CAX Integrated Systems; ^Composite Materials Technologies; Concurrent Engineering; ^Non-conventional Technologies; ^Virtual Manufacturing; Innovation, Creativity and Industrial Development; ^Manufacturing Systems; Welding Technologies; ^Industrial Design; V Gear Design and Technologies.



<http://www.modtech.ro>

**ModTech Publishing House**

**Bld. Carol I, No. 28A**  
**700504, Iasi, Romania**  
**Tel./Fax: 0040 332 415472**  
**E-mail: [office@modtech.ro](mailto:office@modtech.ro)**  
**<http://www.modtech.ro>**

**Copyright © 2014**

All rights are reserved to International Journal of Modern Manufacturing Technologies

## Editor-in-Chief

Professor **Dumitru Nedelcu** "Gheorghe Asachi" Technical University of Iasi, Romania

## Editors

Professor **Francisco Chinesta**, Ecole Centrale Nantes, France  
Professor **Antonio Gonçalves Coelho**, New University of Lisbon, Portugal  
Professor **Catalin Fetecau**, "Dunărea de Jos" University of Galati, Romania  
Professor **Ziyi Ge**, Ningbo Institute of Material Technology & Engineering, Chinese Academy of Sciences, Ningbo, China  
Professor **Peter Lorenz**, University of Applied Sciences Saarbrücken, Germany  
Professor **Ioan Marinescu**, University of Toledo, Ohio, USA  
Professor **Olivera Milosevic**, Institute of Technical Sciences, Belgrade, Serbia  
Professor **Makio Naito**, Osaka University, Japan  
Professor **Hong-Seok Park**, University of Ulsan, South Korea  
Professor **Octavian Pruteanu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
Professor **Robert Ritchie**, University of California Berkeley, USA  
Professor **Laurentiu Slatineanu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
Professor **Pavel Topala**, "Alec Russo" University of Balti, Republic of Moldova  
Professor **José Manuel Torralba**, University "Carlos III" of Madrid, Spain  
Professor **Remus Zagan**, "Ovidius" University of Constanta, Romania

## Scientific Committee

Professor **Mihaela Banu**, University of Michigan, Ann Arbor, USA  
Senior Principal Scientist Dr. **Radhey Shyam Beniwal**, CSIR-NISCAIR, New Delhi, India  
Professor **Konstantinos -Dionysios Bouzakis**, Aristotelis University of Salonica, Greece  
Professor **Gheorghe Brabie**, University of Bacau, Romania  
Professor **Esteban Broitman**, Linköping University, Sweden  
Professor **Paul Dan Brândasu**, "Lucian Blaga" University of Sibiu, Romania  
Professor **Francisco Chinesta**, École Centrale Nantes, France  
Professor **Tudor Chereches**, Military Academy of Bucharest, Romania  
Associate Professor **Petru Cobzaru**, "Stefan cel Mare" University of Suceava, Romania  
Professor **Antonio Gonçalves Coelho**, New University of Lisbon, Portugal  
Professor **George Draghici**, "Politehnica" University of Timișoara, Romania  
Professor **Alexandru Epureanu**, "Dunărea de Jos" University of Galati, Romania  
Professor **Kevin L. Edwards**, School of Engineering, University of Derby, United Kingdom  
Professor **Catalin Fetecau**, University "Dunărea de Jos" of Galati, Romania  
Professor **Manuel Alberto M. Ferreira**, ISCTE-IUL, Lisboa, Portugal  
Professor **Ziyi Ge**, Ningbo Institute of Material Technology & Engineering, Chinese Academy of Sciences, Ningbo, China  
Professor **Csaba Gyenge**, Technical University of Cluj Napoca, Romania  
Professor **Traian Gramescu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
Associate Professor **Natalia Kamanina**, Vavilov State Optical Institute, St.-Petersburg, Russia  
Professor **Mieczyslaw Korzynski**, Rzeszow University, Poland

Professor **David Hui**, University of New Orleans, USA  
 Professor **Figiri Hodaj**, Politechnical Institute of Grenoble (PHELMA), France  
 Professor **Nicolae Valentin Ivan**, "Transilvania" University of Braşov, Romania  
 Associate Professor **Remon Pop-Iliev**, UOIT University of Institute of Technology, Oshawa, Canada  
 Professor **Peter Lorenz**, University of Applied Sciences Saarbrücken, Germany  
 Associate Professor **Alexandru Marin**, Technical University of Moldova, Chişinău, Republic of Moldova  
 Professor **Sarwoko Mangkoedihardjo**, Tenth of November Institute of Technology, Surabaya, Indonesia  
 Professor **Ioan Marinescu**, University of Toledo, Ohio, USA  
 Professor **Alexander Mikhaylov**, National Technical University of Donetsk, Ukraine  
 Professor **Olivera Milosevic**, Institute of Technical Sciences of the Serbian Academy of Sciences and Arts  
 Professor **Radovanovic Miroslav**, University of Nis, Serbia  
 Professor **Sevasti Mitsi**, "Aristoteles" University of Thessaloniki, Greece  
 Associate Professor **Antonio Mourão**, New University of Lisbon, Portugal  
 Professor **Eben Joseph Muse**, University of Bangor, United Kingdom  
 Professor **Makio Naito**, JWRI, Osaka University, Japan  
 Professor **Dumitru Nedelcu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
 Professor **Hong Seok Park**, School of Mechanical Engineering, Ulsan, South Korea  
 Professor **Mihaela Picu**, "Dunărea de Jos" University of Galati, Romania  
 Professor **Marcel Sabin Popa**, Technical University of Cluj-Napoca, Romania  
 Professor **Cristian Predescu**, "Politehnica" University of Bucharest, Romania  
 Professor **Octavian Pruteanu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
 Professor **Robert O. Ritchie**, University of California, Berkeley, USA  
 Professor **Fernando Rizzo**, Pontificia Universidad de Rio de Janeiro, Brasil  
 Associate Professor **Loredana Santo**, "Tor Vergata" University of Rome, Italy  
 Professor **Mamoru Senna**, Keio University, Japan  
 Professor **Eugen Neculai Seghedin**, "Gheorghe Asachi" Technical University of Iasi, Romania  
 Dr.-Eng. Dipl.-Phys **Hans-Peter Schulze Otto-von-Guericke-University**, Magdeburg, Germany  
 Professor **Laurentiu Slatineanu**, "Gheorghe Asachi" Technical University of Iasi, Romania  
 Professor **Nadezda Stevulova**, Technical University of Kosice, Slovakia  
 Professor **Andrey N. Streletskii**, N.N. Semenov Institute, Moscow, Russia  
 Associate Professor **Alexei Toca**, Technical University of Moldova, Chişinău, Republic of Moldova  
 Professor **Jose Manuel Torralba**, University Carlos III, Madrid, Spain  
 Professor **Pavel Topala**, "Alec Russo" State University of Balti, Republic of Moldova  
 Professor **Marcel Van de Voorde**, University of Technology DELFT, Netherlands  
 Professor **Vasilios Tsoukalas**, Merchant Marine Academy, Athens, Greece  
 Professor **Remus Zagan**, Constanta Maritime University, Romania  
 Lecturer **Andrzej Wrobel**, Silesian University of Gliwice, Poland



Y The International Journal of Modern Manufacturing Technologies is supported by Professional Association in Modern Manufacturing Technologies, ModTech Iasi-Romania.

Y The authors are responsible for the content and the validity of experimental results of their articles submitted and should ensure that they have permission from all parties involved to make public the information.

<http://www.modtech.ro>

**Address:** Professional Association in Modern Manufacturing Technologies, ModTech Iasi-Romania  
 Blvd. Carol I, No. 28A, Bl. E4, Sc. B, Et.1, Ap.6, 700504 Iasi, ROMANIA Tel +40 332 415472, Fax +40 332 415472, E-mail: [office@modtech.ro](mailto:office@modtech.ro); [office.modtech@gmail.com](mailto:office.modtech@gmail.com); <http://www.modtech.ro>.

## CONTENT

<i>Tool Management Decision - Making System for CNC Workshops</i> .....7 Adriana Albu, Constantin Cărașu, Loredana Stanciu	
<i>Some Aspects Concerning the Micro Indentation Testing of Ultramid Plastic Materials</i> .....11 Ciprian Cioru, Gheorghe Cretu	
<i>Finite Element Based Optimization in the Process of Selecting the Geometric Design Features Constructions</i> .....15 Piotr Gendarz, Dominik Rabsztyn	
<i>Input Parameter Influence on Parts Profiles Obtained Through Magnetic Shaping</i> .....23 Traian Grănescu, Cătălin Mocanu, Constantin Cărașu	
<i>The Out-of-Roundness Analysis of Inner Cylindrical Surface Processed by Grinding</i> .....30 Cristina Hincu, Constantin Cărașu, Octavian Pruteanu	
<i>Production Planning and Control Using Advanced Simulation Systems</i> .....38 Damian Krenczyk, Malgorzata Ölender	
<i>Finite Element Modeling of Residual Stresses Obtained by Cutting Pieces: A Review</i> .....44 Pavellurea	
<i>Biodegradable Composite Materials -Arboform: A Review</i> .....63 Simona Plăvănescu (Mazurchevici)	
<i>Introduction to the Ordered Families of Constructions</i> .....85 Dominik Rabsztyn	
<i>Obtaining Surfaces with Taylor Cone Shaped Asperities of Micro- and Mano-Scale Dimensions Using the EDI Method</i> .....91 Pavel Topalá, Vitalie Beșliu, Vladislav Rusnac, Dorin Guzgan, Irina Pleșco	

## OBTAINING SURFACES WITH TAYLOR CONE SHAPED ASPERITIES OF MICRO- AND NANO-SCALE DIMENSIONS USING THE EDI METHOD

Pavel Topală, Vitalie Beşliu, Vladislav Rusnac, Dorin Guţgan, Irina Pleşco

Alecu Russo State University of Bălţi, Puskin Street 38, Bălţi 3100, Republic of Moldova

Corresponding author: Pavel Topală, [pavel.topala@gmail.com](mailto:pavel.topala@gmail.com)

**Abstract:** Nowadays the stage of technical progress is characterized by a transit from macro to micro and nano scale dimensions. The present paper is devoted to experimental investigations concerning the treatment of conductive surfaces by applying electric discharges in impulse (EDI). We have particularly focused on the modifications of metal surface micro-geometry leading to the formation of Taylor cone shaped asperities. We have established and presented the best energetic regimes of extracting the latter from cylindrical and flat pieces made of W+10%Re using EDI.

**Key words:** electrode spots, meniscus, impulse, micro-geometry, metal surface, electric discharges, electrode, Taylor cones.

### 1. INTRODUCTION

The modern stage of scientific and technical progress is characterized by a transit from macro- to micro- and nano- organization of matter.

It was stated that during the treatment of metal surfaces using EDI the material is drawn on the electrodes and this is accompanied by the formation of spherical calotte shaped craters. Such a surface geometry is caused by the form of electrode spots [1, 5].

The already formed craters facilitate the creation of new craters in the electric field strongly concentrated at the edge of the existing ones [8].

Three types of craters are registered, all of them having the form of a spherical calotte: the first is even, the second is rough and the third has a Taylor cone shaped asperity in the middle. Asperities of this type have been observed not only in the centre of craters as some authors stated [2], but also at their periphery.

Based on the phenomena described above (obtaining craters and forming conic asperities on the electrode surface, which we observe during the process of metal surface treatment by applying EDI), we confirm the fact that this process may be largely used aiming at modifying the micro-geometry and chemical composition of metal surfaces of different geometry [3, 4]. The process of modifying the micro-

geometry of metal surfaces consist in the formation on them of some conic asperities (Taylor cones) and this leads to the increase of the treated surface by 8 times and, as a result, to the increase of the piece active surface by about 4 times.

The formation of conic asperities on the piece surface treated using EDI leads to the increase of its active area. At present, this phenomenon may be successfully used in the production of cathodes applied in the construction of installations of processing materials with fascicles of electrons or anodes used for the emission of narrow ion fascicles [7] performing the function of concentrating electric and thermal fields in the active zones of cathodes during the process of electronic emission. The treated piece has a surface with a special micro-geometry that would facilitate an electronic, thermal emission and that of electromagnetic fields that are more increased in comparison with the same piece that is not treated using this method.

### 2. METHODOLOGY OF EXPERIMENTAL INVESTIGATIONS

The formation of conic asperities in the centre of craters is due to the perturbation of the liquid metal surface influenced by the electric fields of high strength, the force of superficial voltage of the melted metal and less by the component of weight force.

A special installation containing the following main parts - the RC impulse generator, the inducing block and the control block - has been used to do the research. The control block allows a fine regulation of the discharge frequency within the limits ( $E..10^5$ )Hz.

The electric scheme of the installation is presented in figure 1. If we refer to this scheme we can notice that the control block is destined not only for the variation of the discharge frequency; it also permits to carry out the synchronization of inducing and power impulses. The functioning principle of the generator presented in figure 1 is based on the accumulation of electric energy and its discharge in the electric field.

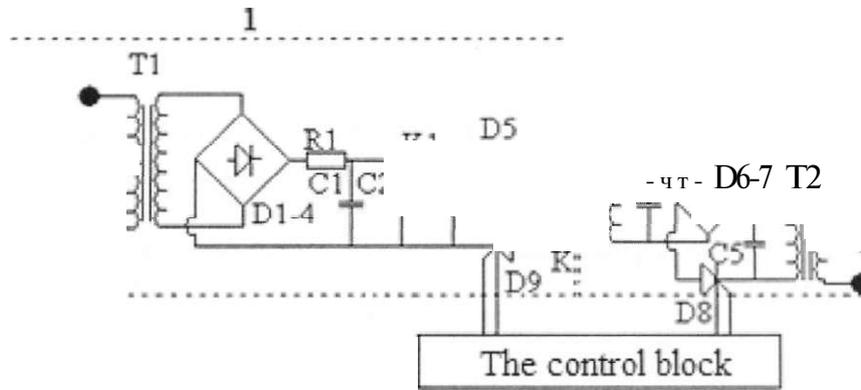


Fig. 1. The main electric scheme of the installation, [8]:  
1 - generator of power impulses; 2 - inducing block.

Cylindrical or flat samples of different dimensions made of wolfram and rhenium alloy with properties presented in Table 1 were prepared to do the research.

Table 1. Properties of materials used in the process of experimental research, [8].

Material	Melting temperature (°C)	Hardness (HB)	Density (kg/m <sup>3</sup> · 10 <sup>-3</sup> )	Specific thermal capacity (cal/(g grad))
W+10%Re	3180	200	21.02	0.0326

Figure 2 presents the position of electrodes used in the process of experimental investigations and their connection in the circuit of discharge of the impulse generator. The previously treated electrodes plucked as elements of the fixing device positioning. Then the electrodes approached each other manually until their contact after which the interstice size was selected.

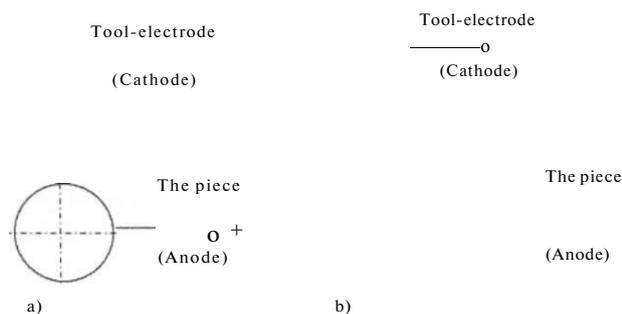


Fig. 2. Schemes of electrode positioning used in the experimental investigations and their connection in the circuit of power impulse generator discharge: a) the case of cylindrical piece; b) the case of flat piece.

To do the experimental investigations on the extraction of Taylor cones on cylindrical surfaces (Fig. 2a) by applying EDI, we used pairs of electrodes - the wire-piece made of the material resented in Table 1 and the tool-electrode of the same material shaped as a cylindrical bar.

The pair of electrodes-piece-plate made of W+10%Re with flat treating surface and a tool-electrode made of the same material but cylindrically

shaped- was used to do the experimental research on extracting Taylor-cone shaped asperities on flat surfaces (Fig. 2b).

Throughout the research we obtained Taylor cones when the generator battery is charged with voltage values between (40...240)V and the capacity of the condenser battery is modified gradually (with the pace 100uF) within the limits (100...600)uF, the interstice S selected between electrodes (0.1...0.4)mm, the thickness of electrodes within the limits (0.2...4)mm, made of the material presented in Table 1.

### 3. THE RESULTS OF EXPERIMENTAL INVESTIGATIONS

Having studied the samples of the surfaces treated via the method of EDI using the method of optic microscopy with the optical microscope XIM600 and the SEM with electronic microscopes Vega TESCAN 5130 and QUANTA 200 (FEI Fillips), we can observe that Taylor cones are formed not only in the centre of the crater but also at its peripheries due to the development of electro-hydrodynamic instability on the melted tungsten surface as a reaction of the plasma channels and the substance interaction (Figures 3, 5).

Varying the interstice size, it is possible to obtain almost any degree of intensification of the working surfaces with the emission of energy on the surfaces subjected to treatment or in the interstice. Increasing the interstice size, we may obtain such states when

the heating of the volume of the treated material is not essential and the geometry of the sample surfaces does not change. This possibility may be applied in the development of new surface treating technologies by applying electric discharges in impulse.


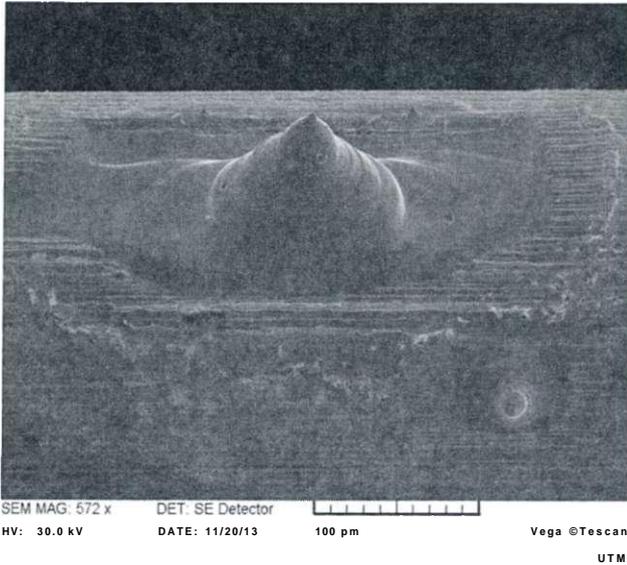


Fig. 3. Scanning electron microscope (SEM) image of a conic asperity surrounded by smaller ones, extracted on the surface of the piece material at a solitary discharge (the piece and the tool-electrode being made of W+Re10% as cylindrical wire with a diameter of 0.2mm, the condenser battery charged at the voltage  $U=70V$ ; the capacity of the condenser battery is  $C=200\mu F$ , the interstice having the value  $S=0.2mm$ )


It was practically stated that the efficiency of forming cones on metal surfaces is significantly greater when the piece is connected as anode [5, 6]. This phenomenon is due to the fact that at short electric discharges the emission of energy is stronger at the anode (Fig. 4a) for the same value of electric current that passes the interstice under conditions of a solitary electric discharge, the decrease of cathodic voltage is lower (as an absolute value) than the anodic one and, as a result, it gets cool sooner without cone extraction (Fig. 4b).

To modify the micro geometry of metal surfaces the tool electrode should be connected in the circuit of discharge as cathode because for a longer period of time it will not essentially change the form and dimensions initially established. This will permit to homogenize the treating process using the EDI method.

A plasma channel is noticed at one cm distance and at 0.5cm distance there are approximately three channels. Thus if the distance is shorter than 0.2mm, the number of channels is higher and their enumeration practically becomes impossible. The

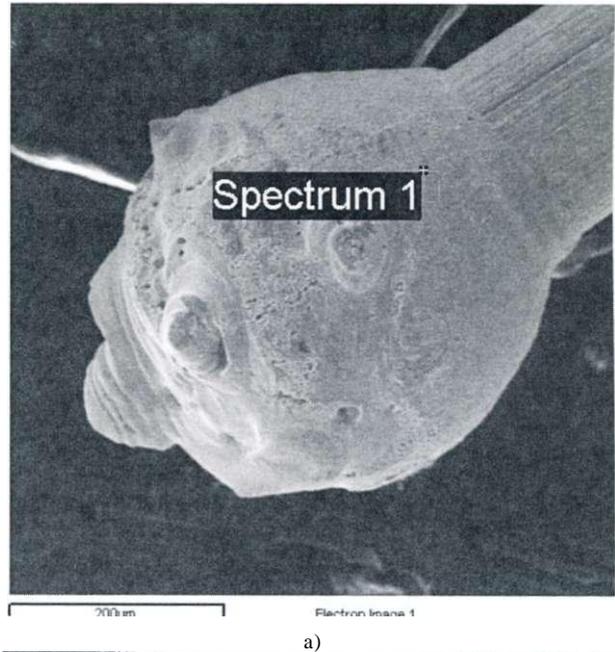

a)

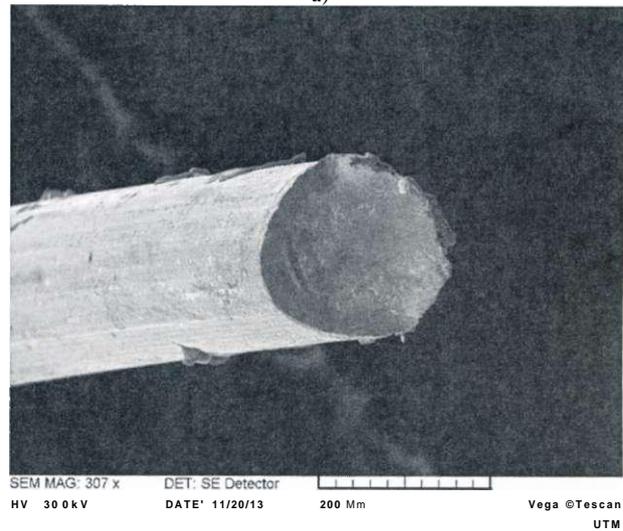

b)

Fig. 4. SEM images of tool-electrodes made of W+Re10% that participated in the treating process:  $U=60V$ ,  $C=200\mu F$ ,  $0 \dots i=0$ ,  $i_{e\text{ce}}=0.2mm$ ;  $S=0.2mm$ ,  $n>1$ ; a) the tool-electrode connected as anode; b) the tool-electrode connected as cathode

presence of many channels leads to the formation of more asperities during one power discharge. This phenomenon is stronger when more electric discharges in pulse are applied (Fig. 5) or the voltage among electrodes is equal to 80V and higher (valid for the material and conditions described above). Power parameters define the possibility of extracting cones. It was practically stated that no cones are obtained on the surface of the used sample at voltages lower than 30V. The influence of the capacity is not so significant, the cones are obtained as successfully at  $C=200\mu F$  as at  $C=600\mu F$ . However in cases of increasing capacity value, the obtained asperities have a bigger diameter.



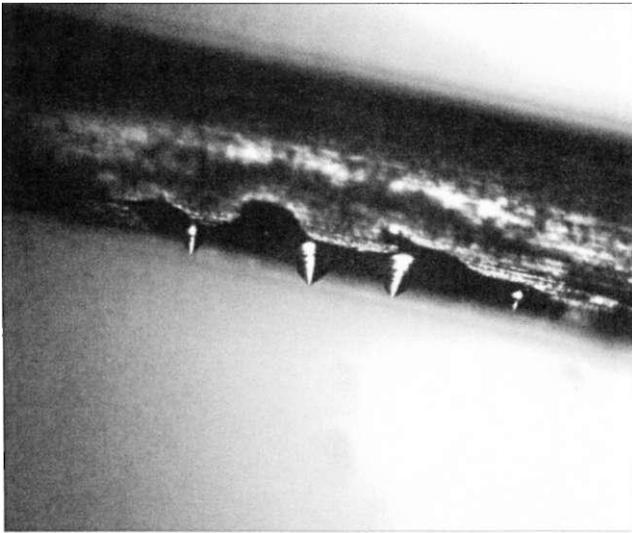


Fig. 5. Optical image of piece electrodes that participated in the treating process: W+Re 10%; U=60V; C=200uP; S= 0,001=0piece O.2mm; n=2.

Cones are not obtained at treating cylindrical samples (anode) with tool-electrodes (cathode) with diameters

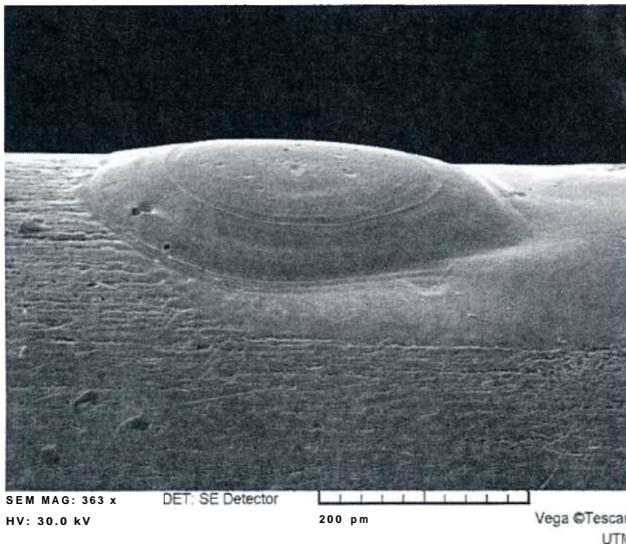

a)

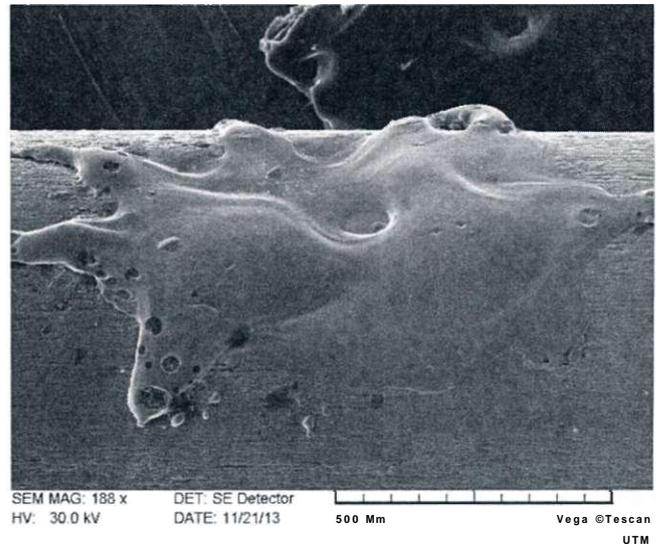

b)

Fig. 6. SEM images of samples that participated in the treating process W+Re10% :

a) tool-electrode (anode) • U=60V, C=200uF, 0,001=0p =0.4mm; S=0.2mm;

b) tool-electrode (anode) U=60V, C=200uF, 0,001=0p =0.4mm; S=0.2mm.

It has been proved that it is more important for, at least, one of the electrodes to have a smaller active surface area.

However the situation when the active surface area of the cathode (the tool) is smaller due to the increase of the electric field strength and that of the temperature one on the anode surface (the piece) is more efficient. The tool-electrode (cathode) with the diameter equal to 0.2 mm was applied under the conditions of realized experimental endeavors. In this case, the active surface area is  $3.14 \cdot 10^{-8} \text{ m}^2$ . Using the same cathodes we can extract Taylor cone shaped asperities even on flat surfaces, but in this case it is more

equal to 0.4mm in the same power regimes on the treated surface; we can only notice electrode spots, waves or torn drops (Fig. 6a). This phenomenon is explained by the fact that in this case the impulse energy is distributed on a bigger surface.

As the volume of the melted metal in this case is about four times bigger, the weight force and the superficial tension surpass the electro-dynamic forces so that they prevent the cone formation. The increase of the electric field strength could become the solution of the problem but its excessive application leads to the overheating and evaporation of the sample material (Fig. 6b). It is however possible to extract cone asperities on such pieces by increasing the current density, it means increasing the impulse current or using narrower tool electrodes.

No conic asperity was formed on the cylindrical sample with  $d=0.4\text{mm}$  connected as anode and treated by applying the tool-electrode with  $d=0.4\text{mm}$ . It is however possible to obtain a conic meniscus but in more optimum electric regimes.

difficult to adjust the energetic parameters (Fig. 7).

The number and size of sample conic asperities depend on the irregularities present on the surface of both electrodes, on their area and on the initial form of the working piece and do not depend on the thickness and volume of the electrodes.

In the next two experiments, the tool-electrode with the diameter of 4mm of the same material (present in Table 1) was used as a sample for cylindrical pieces with the same diameter of 4mm, one with a flat work surface and the other with a sharp one (the angle at the top is  $\approx 30^\circ$ ). The electrode-pieces were connected as anodes in the same energetic regime.


a)

b)


Fig. 7. SEM images of flat samples that participated in the treating process:  
a) magnification 87x; b) magnification 1.32kx.

As a result, a multitude of asperities were obtained on the sharp end after ten consecutive power discharges, comparatively larger (Fig. 8a) than on the flat end

where more semi-spherical craters with small cones in the centre were formed (Fig. 8b).

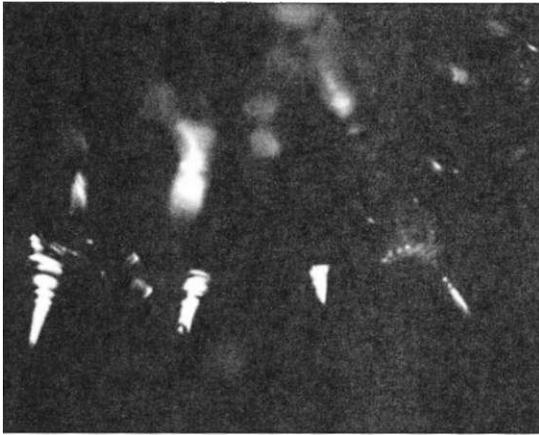

a)

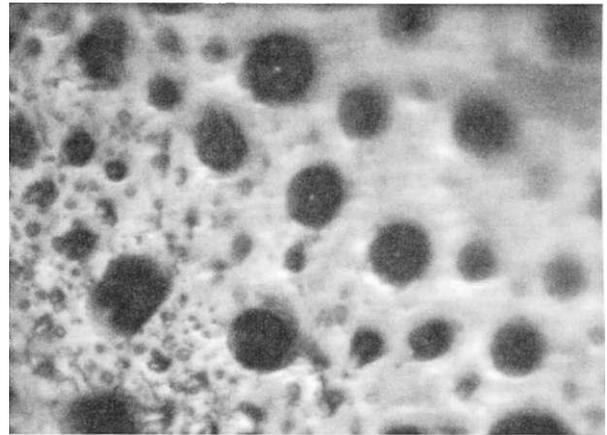

b)

Fig. 8. Surface morphology of anodes that participated in the treating process: W+Re10%; U=240V; C=600uF; S=0,3mm; 0tooi=0piece=4mm; n=10.

It follows that to obtain Taylor cones using EDI the spatial dimensions (3D) of the samples are not so significant as the surface dimensions (2D) and the initial roughness of the treated surface. After the glazed flat surface of the same sample was treated, we obtained cones that were several times smaller than those on the sharp surface. In the first case (Fig. 8a), the cones are much bigger compared to the craters. In the second case (Fig. 8b), the end of the cone is at the same level with the semi-spherical crater.

The application of modern equipment of investigation (SEM) permits us to state that the lateral surface of the formed asperities is a complicated one and presents micro and nano-scale waves (Fig. 9). These

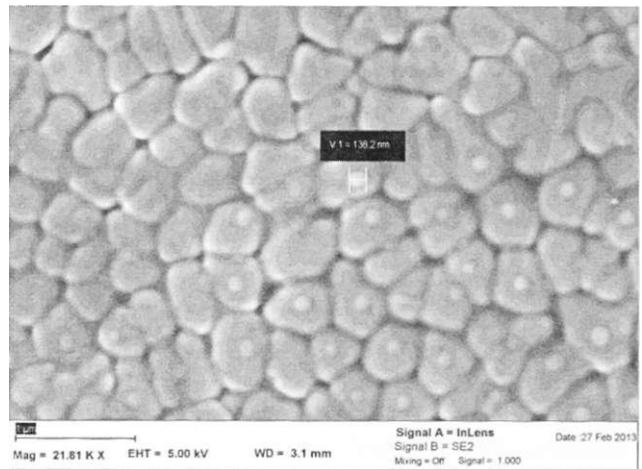


Fig. 9. SEM image of mosaic blocks on the lateral surface of a Taylor shape cone.

waves are possibly caused by the variation of current in electric discharge. It has already been demonstrated that EDI is multichannel [5]. Some channels of discharge die while others are formed. Because of this, the current of solitary electric discharge have a pulsotronic character [6]. The waves of lateral surface increase the area of the active surface.

Further analysis of the lateral surface of Taylor type cones has demonstrated that during the process of solidification and formation of solid material grains asperities of nano- scale dimensions are additionally crystallized on their surface. The faze structure and analysis of their material require additional investigation.

#### 4. CONCLUSIONS

Having analyzed the results obtained were resulted the following conclusions:

- a) The use of the EDI method to modify the micro-geometry of metal surfaces permits the increase of its active area by several times.
- b) The extraction of conic asperities in the process of treatment with EDI is more favorable if the piece is connected as anode. However the successful extraction of asperities from the cathode in conformity with the theory of developing capillary waves is not excluded;
- c) Supplementary capillary waves with mosaic blocks of nano-scale asperities are attested on the lateral surface of the Taylor cones;
- d) When voltage higher than 80V is applied, more conic asperities are extracted at one or more electric discharges in impulse;

#### REFERENCES

1. Topala, P., Dushenko, V., Gitlevichi, A., (1990), *On the conditions of melt formation on the surface of the cathode-piece during electro-spark alloying on installations of Razread type*, Electronic processing of materials, No. 6, pp. 17-18, Chişinău.
2. Grigoriev, A. I., Shiriaeva, S. O., Belonjko, D. F., Klimov, A. V., (2004), *On the form of the Taylor cone and the characteristic time of its growth*, ZOM, No. 4, pp. 34-40, Chişinău.
3. Topala, P., Olaru, I., Rusnac, V., (2—5), *New sequences on the physical picture of electrical erosion*, Collection of scientific papers, The Modern Technologies, Quality, Restructuring, Vol. 2, Chişinău.
4. Pavel Topala, (2007), *Electrical charges as measure for removed metal mass the electrical discharge machining*, Publishing PIM, Non-conventional Technologies Review, No. 4, pp. 103-108, Iasi.

5. Topala, P., Stoicev, P., (2008), *Processing technologies of conductive materials by electrical discharges in impulse*, Tehnica-TNFO Publishing House, pp. 265, Chişinău.

6. Pavel Topala, Vladislav Rusnac, Dorin Guzman, (2012), *Increasing the thermoelectric capacity of emission in cathodes by modifying their surface micro-geometry*, The 16<sup>th</sup> International Conference Inventica 2012, June 13-15, Iasi, România, Publishing Performantica, National Institute of Inventics, Iasi, pp. 623-624, ISSN 1844-7880.

7. Wilson Perry, (2007), *Formation of Taylor Cones on a Molten Metal Surface Followed by Ion Injection Into the Vacuum*, SLAC International Conference, pp. 34-38.

8. Pavel Topala, Dorin Guzman, (2013), *The Technology of Surface Micro-geometry Modifications Via the Application of Electric Discharges in Impulse*, Advanced Manufacturing Technologies, Publishing 14, CEEPUS III, Sozopol, Bulgaria.

Received: June 05, 2014 / Accepted: December 10, 2014 / Paper available online: December 15, 2014 © International Journal of Modern Manufacturing Technologies.